






## Catalogue

Product Feature .....	Page2
Technical Parameters .....	Page 3
Application .....	Page 3
Product Size & Shape .....	Page 4
Installation & Instructions .....	Page 4
Packages and Marks.....	Page 5
Notes.....	Page 6

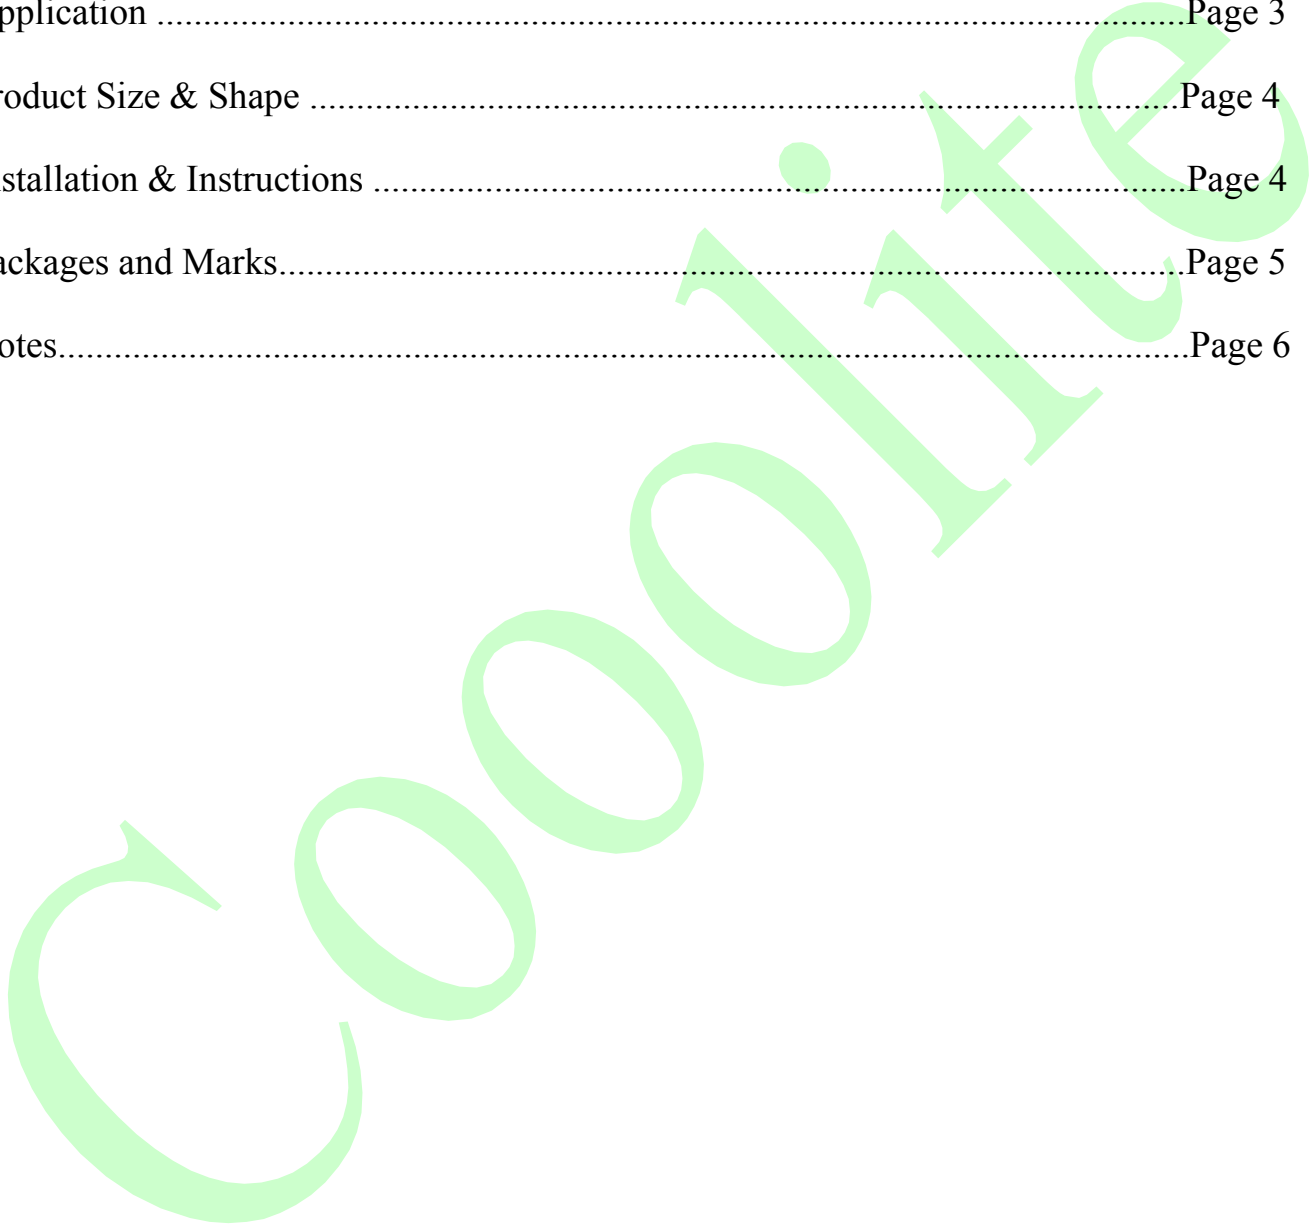

## Product Feature

### Energy-saving

- Saving over 40% energy than energy-saving bulb, and 80% than halogen bulb.
- Efficiency of power supply is 75% or more.
- Using the led with more than 110 LM/W as light source.
- replacing 40W traditional halogen bulb.

### Environmental Protection & Safety

- Using aluminium alloy and PC plastic components, recycling rate is more than 98.5%.
- No mercury, UV, IR and other toxic substances, it is environment-friendly.

### Built-in Power Supply

- Power supply built-in, can replace the traditional bulb directly and easy to install & maintain.

### Diversified Options

- Special color available to meet different requirements.
- LED chip is from Epistar in Taiwan.
- The product can be dimmable.
- Different colors for choice: warm white (2800-3500K)、natural white (4000-4800K)、cool white (5000-6500K)

### Special Structure Design

- Using low thermal resistance SMD LED as light source, the lifespan of product is up to 30,000 hrs
- The unique designed radiator is made from 6063 aluminum to ensure the heat can spread to the surface of radiator quickly.

### Unique Optical Design

- Using the glass cover of which the inner was whitened, no glare, well distributed light

### Warranty

- 3 years warranty.

### Technical Data

Technical Parameters:

No.	Item	Technical Parameters
1	Voltage	100-240V AC
2	Total Power Consumption	4W
3	LED Power	3W
4	Power Factor	≥0.6
5	LED Quantity	9 pcs
6	LED Type	SMD LED
7	Luminous Flux	300LM±5% (5000K~6500K Color Temperature)
8	Working Temperature	-20-45 °C
9	Circuit Board Temperature Rise	20-25°C
10	Size	Φ55*110mm
11	Base	E27, E14
12	Net Weight	85
13	Illuminance(1M)	LUX(5000K - 6500K Color Temperature)
14	Beam Angle	180°
15	Certificates	CE/FCC/PSE/RoHS


Specification:

Item No.	Color	Color Temperature	Initial Illuminous Flux(LM)	Total Power	Color Rendering Index	Efficiency (LM/W)
CLT-B005-04C	Cool white	5000-6500K	300LM±5%	5W	≥70	60 LM/W
CLT-B005-04N	Natural white	4000-4800K	285LM±5%	5W	≥70	57 LM/W
CLT-B005-04W	Warm white	2800-3500K	270LM±5%	5W	≥70	54 LM/W

### Application

- Replacing the traditional bulb.
- Office, commercial places, market, colleges, hospitals, hotels, parking lots, urban underground, passage, factory, municipal administrative projects, household etc lighting area.

## Product Size &amp; Shape

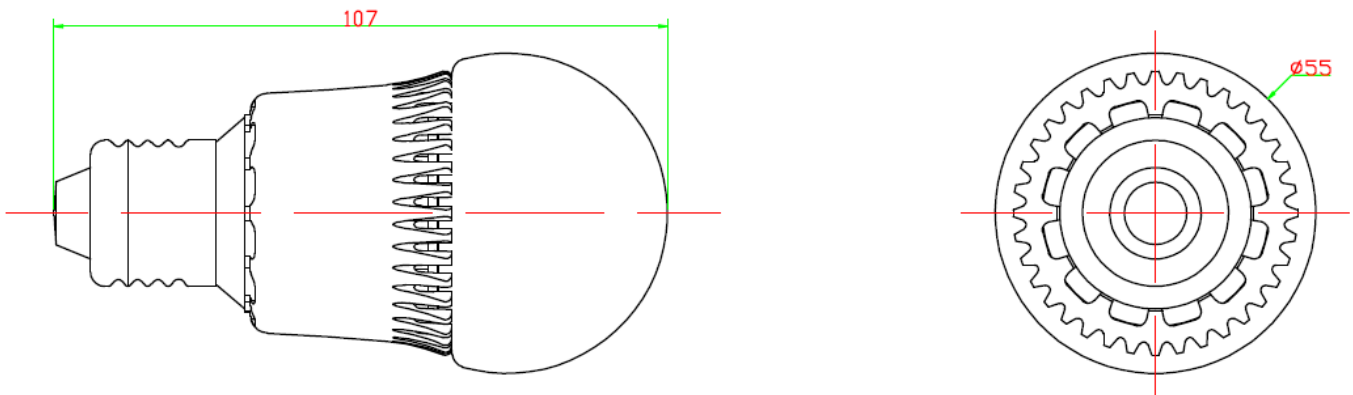


COOLITE


## Installation &amp; Instructions

The product doesn't have special installation requirements and installs it as the usual lamps.

### Packages & Marks



Size of inner carton:60\*60\*115MM

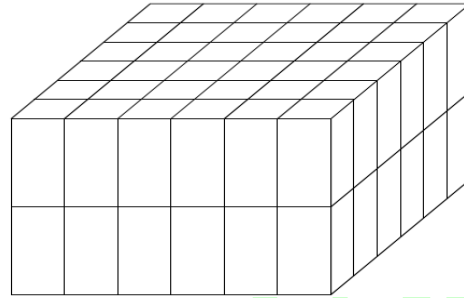

Size of outer carton:390\*390\*260MM (72pcs/carton)

#### 1. Label on the outer packing

Item	LED bulb
Model	CLT-B005-03
Qty	
G.W	
Date	
Coolite (Shenzhen) Opto-electronics Lighting Co.,Ltd www.coolite.com & www.coolite.net	

#### 2. Label on the inner packing

Item	LED bulb
Model	CLT-B005-03
N.W	85g
Input Voltage	100-240V AC
Lumens	
Color Temperature	
Date	
Coolite (Shenzhen) Opto-electronics Lighting Co.,Ltd www.coolite.com & www.coolite.net	

#### 3. Label on the product

A55 5W LED Bulb			
Input: 100-240V AC			
Output:	*V	*mA	
CK:	3500K	4500K	5500K
CE	PSE	ROHS	FCC

## Notes

1. When installing, please power off for the safety.
2. When the bulb is under working, please don't touch the surface directly to avoid being burned.
3. The normal working temperature of tube is  $-20\sim 45^{\circ}\text{C}$ , it is not suitable for working under poor ventilation condition and high temperature . Good ventilation condition can extend its lifespan.
4. When finding the LED bulb light work abnormally (extinguish, flicker), you should ask professional inspectors to check the contact state between base and lamp socket ,as well as the input voltage, don't do it by yourself to avoid being electrocuted. If there are some other problems ,please contact with the distributors.
5. There are no extra parts inside of the fixture, Don't open it without Professionals.
- 6 . Products shall be subject to any changes without additional notices
- 7 .Any questions, please contact us or our agents directly.